










Your benefits

- Precise rail grinding after welding
- Possibility to grind the switches' frog by using the rollers extension (accessory)
- Quick machine setting the main type of rails (Flat bottom, grooved rail, bridge crane...) thanks to the 3 different rollers on the pivoting selector
- Easy maintenance scheduling thanks to the integrated hour meter
- Honda approved operation. Reliability and performance approved by Honda.

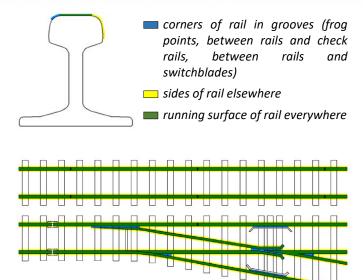

Drawing of grinding areas for MP6



Result after grinding

Specification	
Engine	Honda GXR120
Engine output	2.7 kW (3.6 hp) 4,800 rpm
Mass	Approx. 56 kg (123 lbs)
Tilting range	Up to 90°
Total stroke of the grindstone	65 mm (2.6 in.)
Dimensions (L x W x H)	1,065 x 535 x 685 mm (42 x 21 x 27 in.)

Consumables and accessories

- Cup wheel grindstones (several dimensions available)
- Grindstones holder (several dimensions available)
- O Rollers extension for switch's frog grinding
- Kickstand
- Grindstone cover and grindstone for grooved rail

Optional equipment

Electric engine



Rollers rotation selector

