


UNIVERSAL RAIL LIFTING LEVER

PLR750

*A range of accessories
for all of your works*

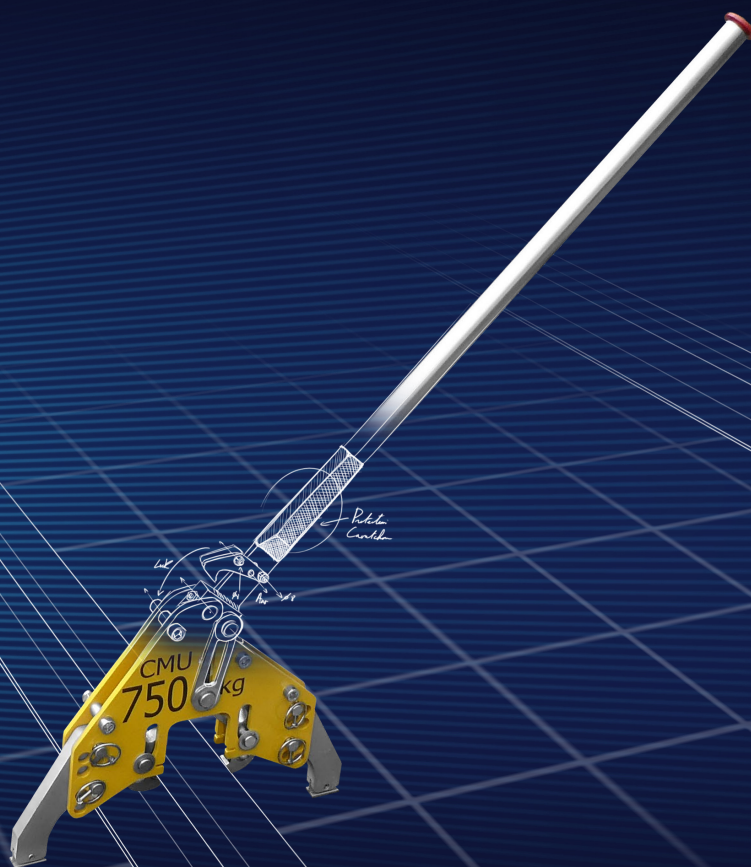

*Accurate lifting of flat bottom rails
Lightweight and easy to handle pliers
Safe operating lever*




UNIVERSAL RAIL LIFTING LEVER

PLR750

Your benefits

- Suitable for most rails and fasteners
- Lightweight and easy to handle clip
- Visual assistance to check the correct feet position in relation to the rail to be lifted
- Simple adjustment of the clamp according to the rail, fixing system and level of support on the sleeper (wood or concrete)
- Articulated pads for perfect support on the sleeper regardless of the inclination of the zones on either side of the seat of the rail
- Manoeuvring lever incorporating a lock preventing any accidental use

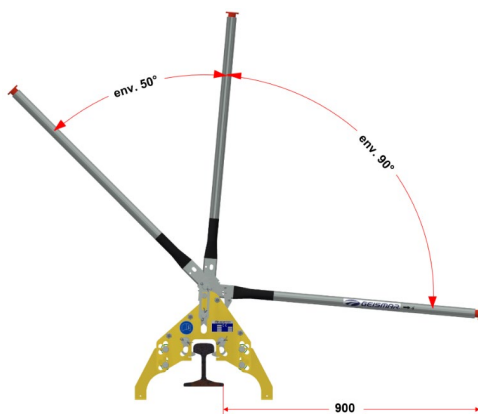

Range of motion – lifting phase

Technical specifications

Maximum lifting use	750 kg (1,653 lbs)
Rail lifting height	25 mm (0.98 mm)
Dimensions (L x W x H)	Approx. 1,210 x 80 x 420 mm (47.6 x 3.14 x 16.5 in.)
Mass	Approx. 9 kg (19.8 lbs)



Limits of use *

Rail profiles

50E2	UIC54 / 54E1 / SBB III / CFF III	46E1 / SBB I / CFF I	S64
50E2T1	UIC542 / 54E2 / SBB IV / CFF IV	46E2 / U33	U54
60E1	S54	50E6 / U50	
60E1T2	S49 / 49E1	SJ50	

Sleepers

Wood	Oak	Azobe
Concrete	Bibloc	Monobloc

Rail fastening systems

Pandrol e-clip	Pandrol Fastclip	Vossloh	Angle clamp
Elastic clamp RN			

* Other needs on request